QUANTIFI PHOTONICS®
A Teradyne Company



LASER

1200 SERIES
DFB LASER SOURCE

SPECIFICATION SHEET

quantifiphotonics.com

The Laser 1200 Series provides stable, fixed-wavelength laser output for photonics characterization, validation, and production testing.

Available in a wide range of standard wavelength and power configurations, it combines reliable optical performance with simple software control through SCPI, CohesionUI™, or your preferred programming language, enabling seamless integration into both laboratory and automated test environments.



1, 2 or 4 lasers in a single instrument

Achieve high channel density with up to 68 channels in an 18-slot PXI chassis or 4 channels in an ultra-compact benchtop instrument.



Simple, intuitive operation

CohesionUI is an intuitive web-based user interface that makes it simple to control our PXI instruments from modern web browsers.



Superior power accuracy

Advanced calibration for flat power response, ideal for applications including Coherent, Orthoganal Frequency-Division Multiplexing (OFDM) transmission and WDM networks.





Seamless PXI integration


Take advantage of PXI's integrated triggering and synchronization capabilities across electrical and optical instruments for a true mixed-signal test platform.

Simple, intuitive control with Cohesion**UI**™

Cohesion**UI** makes it simple to control our PXI or MATRIQ instruments from a PC, tablet or smartphone. Its cutting-edge design offers a sleek modern interface, cross device compatibility, customizable views and remote network access.

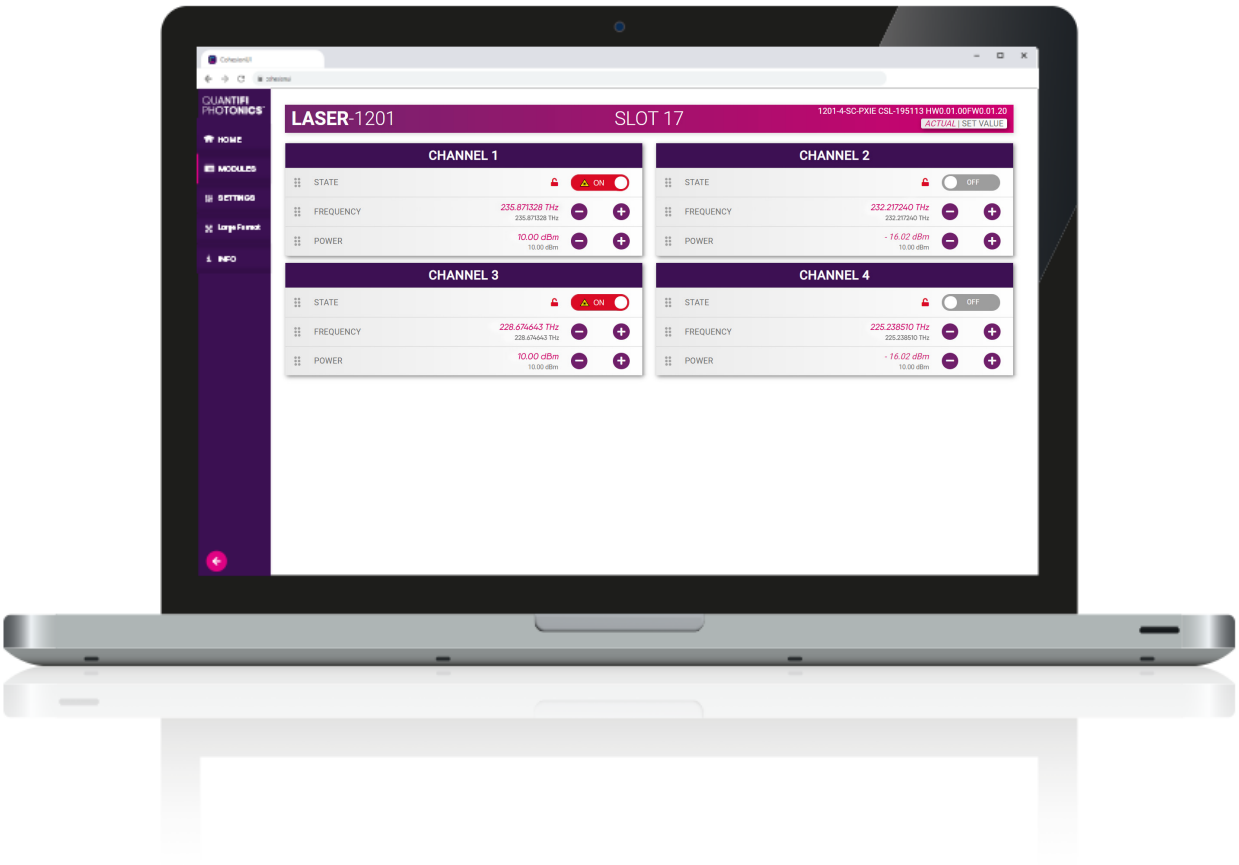

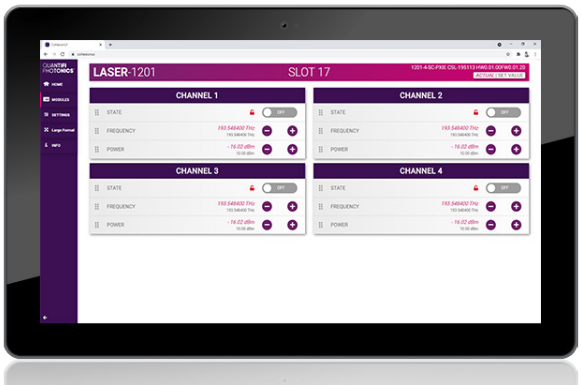

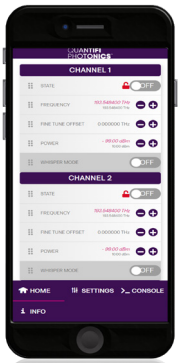

CHOOSE YOUR FORM FACTOR

PXIE - MODULAR

Our expanding range of PXIe optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 2500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption



MATRIQ – COMPACT & PORTABLE

The MATRIQ series provides the same high-performance test capabilities of our PXIe modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.


- Same performance and control as our PXIe modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI or SCPI commands
- Compact and portable design saves benchtop space



PXI – MODULAR



LASER-1210-4-FA-PXIE

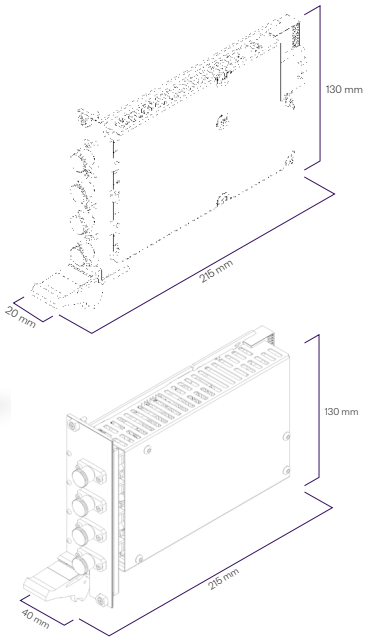



LASER-1231-2-FA-PXIE

MATRIQ – COMPACT & PORTABLE



LASER-1210-4-FA-MTRQ

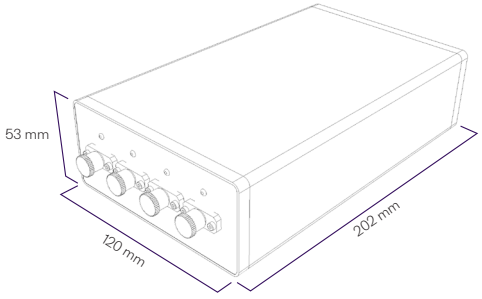

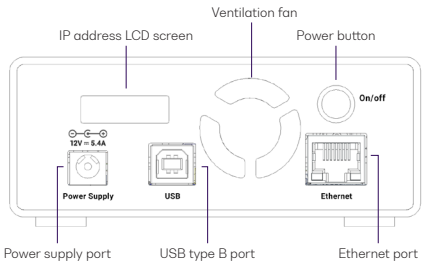

LASER 1200 SERIES TECHNICAL SPECIFICATIONS

General Specifications	PXI	MATRIQ
Bus connection	PXIe	USB and Ethernet
Slot count	**1 slot:** 1207, 1225, 1231, 1232, 1233, 1234, 1238, 1239 **2 slots:** 1210	-
Dimensions (HxWxD)	**1 slot:** 130 x 20 x 215 mm (5.1 x 0.8 x 8.5 inches) **2 slot:** 130 x 40 x 215 mm (5.1 x 1.6 x 8.5 inches)	53 x 120 x 202 mm | 2.1 x 4.7 x 8.0 inches
Weight	~ 1 kg | ~ 2.2 lbs	~ 1.1 kg | ~ 2.4 lbs
Operating temperature range	5 °C to 45 °C | 41 °F to 113 °F	5 °C to 40 °C | 41 °F to 104 °F
Storage temperature range	-40 °C to 70 °C | -40 °F to 158 °F	-40 °C to 70 °C | -40 °F to 158 °F

Power Specifications	PXI	MATRIQ
AC input voltage range	Please refer to the latest PXI Express Hardware Specifications published by the PXI Systems Alliance.	100 to 240 VAC
AC input current		1.3 A (115 VAC), 0.9 A (230 VAC)
AC frequency range		47 to 63 Hz
DC output voltage		12 V
DC output current max		5.41 A
Dimensions (LxWxH)		4.58 x 2.06 x 1.23" (116.3 x 52.4 x 31.3 mm)

Model Number	1207
Fiber type	PM 1310
Number of channels	1 or 2
Optical connector type	FC/APC
Operating wavelengths (nm)	1310
Wavelength accuracy	±3 nm (Typical) | ±5 nm (Max)
Linewidth	0.3 nm / 52 GHz
Maximum optical output power	14.5 dBm
Side mode suppression ratio	30 dB (Min) | 50 dB (Typical)

Model Number	1210
Fiber type	SMF 28
Number of channels	2 or 4
Optical connector type	FC/APC
Operating wavelengths (nm)	1310, 1550
Wavelength accuracy	±3 nm (Typical) | ±5 nm (Max)
Linewidth	1310 nm: 0.2nm | 1550 nm: 1 MHz (Typical)
Maximum optical output power	1310nm: 7 dBm, 1550nm: 10 dBm
Side mode suppression ratio	30 dB (Min)

LASER 1200 SERIES TECHNICAL SPECIFICATIONS

Model Number	1225
Fiber type	PMF
Number of channels	1
Optical connector type	FC/APC
Operating wavelengths (nm)	1310
Wavelength accuracy	±0.5 nm (Max)
Linewidth	5 MHz (Max)
Maximum optical output power	16 dBm
Side mode suppression ratio	40 dB (Min)

Model Number	1231
Fiber type	PMF
Number of channels	4
Optical connector type	SC/APC
Operating wavelengths	1301.47, 1303.73, 1306.01, 1308.28 nm
Wavelength accuracy	±0.5 nm (Typical) | ±1 nm (Max)
Linewidth	5 MHz
Maximum optical output power	16 dBm
Side mode suppression ratio	45 dB (Min)

Model Number	1232
Fiber type	PMF
Number of channels	4
Optical connector type	SC/APC
Operating wavelengths	1310.57, 1312.87, 1315.17, 1317.48 nm
Wavelength accuracy	±0.5 nm (Typical) | ±1 nm (Max)
Linewidth	5 MHz
Maximum optical output power	16 dBm
Side mode suppression ratio	45 dB (Min)

Model Number	1233
Fiber type	PMF
Number of channels	4
Optical connector type	SC/APC
Operating wavelengths	1302.60, 1304.87, 1307.14, 1309.43 nm
Wavelength accuracy	±0.5 nm (Typical) | ±1 nm (Max)
Linewidth	5 MHz
Maximum optical output power	16 dBm
Side mode suppression ratio	45 dB (Min)

LASER 1200 SERIES TECHNICAL SPECIFICATIONS

Model Number	1234
Fiber type	PMF
Number of channels	4
Optical connector type	SC/APC
Operating wavelengths	1311.72, 1314.02, 1316.33, 1318.64 nm
Wavelength accuracy	±0.5 nm (Typical) | ±1 nm (Max)
Linewidth	5 MHz
Maximum optical output power	16 dBm
Side mode suppression ratio	45 dB (Min)

Model Number	1238[3]
Fibre type	PM 1300
Number of channels	2
Optical connector type	FC/APC
Maximum optical output power	22 dBm
Operating wavelengths	1270 nm, 1290 nm
Wavelength accuracy	±1 nm (Typical) | ±3 nm (Max)
Linewidth	5 MHz

Model Number	1239[3]
Fiber type	PM 1300
Number of channels	2
Optical connector type	FC/APC
Maximum optical output power	22 dBm
Operating wavelengths	1310 nm, 1330 nm
Wavelength accuracy	±1 nm (Typical) | ±3 nm (Max)
Linewidth	5 MHz

Notes
1. PM optical connector key alignment: slow axis.
2. These laser powers are consider class 1M as per the IEC 60825-1 standard.
3. Advanced specifications, subject to confirmation.


ORDERING INFORMATION

The LASER 1200 is available in the standard configurations listed below. If your application requires a different configuration, please contact your sales representative to discuss your requirements.

Available configurations:

LASER-1207-1-FA-PXIE
LASER-1207-2-FA-PXIE
LASER-1210-2-FA-PXIE
LASER-1210-4-FA-MTRQ
LASER-1225-1-FA-MTRQ
LASER-1231-4-SA-PXIE
LASER-1232-4-SA-PXIE
LASER-1233-4-SA-PXIE
LASER-1234-4-SA-PXIE
LASER-1238-2-FA-PXIE
LASER-1239-2-FA-PXIE

Configuration number format:

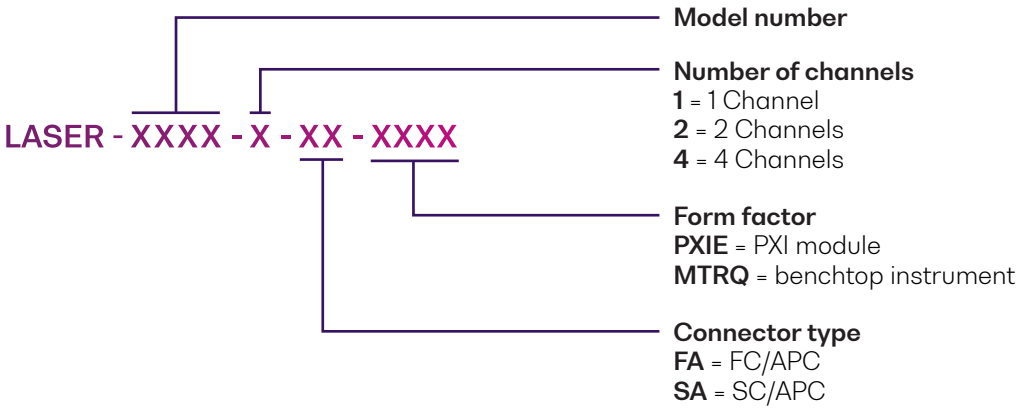

WARRANTY INFORMATION

This product comes with a standard 1 year warranty.

EXTENDED WARRANTIES AND CALIBRATION PLANS

With an **extended warranty and calibration plan** you'll spend more time focused on your priorities and less time worrying about maintenance.

Add a **3 or 5 year extended warranty** when you purchase your Quantifi Photonics instruments.



Guarantee performance

Ensure your equipment is operating at the best it can be for reliable and accurate results.

Lower cost of ownership

Lock in savings and maximise your testing budget with a lower base cost of ownership.

Peace of mind

Spend less time worrying about maintenance and more on generating results.

CALIBRATION PLANS FOR ADDITIONAL DISCOUNTS

Order a **calibration plan** when purchasing your Quantifi Photonics instruments and get additional discounts.

10% Discount On calibrations ordered at the time of purchase.

25% Discount Add on an extended warranty and receive a 25% discount on calibrations.

Over time and with regular use, all optical parts and connectors require re-calibration and maintenance to guarantee accurate and reliable performance. We recommend Quantifi Photonics optical instruments are re-calibrated every 12 months. With an instrument calibration performed by Quantifi Photonics technicians you receive:

- Comprehensive calibration to factory specifications
- End-to-end inspection to ensure all instrument functions are working and connectors are clean
- Firmware, software and documentation updates
- Certificate of calibration which includes detailed test results

How to do I **secure my extended warranty or calibration plan**?

Contact your Quantifi Photonics sales representative or email **sales@quantifiphotonics.com**

Extended warranties and calibration plans must be ordered at the time of purchase and are available only for Quantifi Photonics' products. The 25% calibration discount only applies to calibrations while the product is covered by the extended warranty period.

Versatile test modules for a wide range of requirements and applications.

Tunable Laser Source



Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.

Fixed Wavelength Laser Source



DFB laser sources available in a range of wavelengths and powers up to 24 dBm. Supports SMF, MMF and PMF.

Swept, Tunable Continuous Wave Laser



Swept, tunable continuous wave (CW) laser source with 0.01 dB power stability and 400 nm/s high-speed scan rate for R&D and production testing.

Superluminescent Diode Broadband Light Source



Super-luminescent LED light source with high output power, large bandwidth and low spectral ripple and various wavelengths.

ELSFP-Compliant External Laser Source



Uses ELSFP-compliant pluggable modules to provide 8 channels of CW optical power at 1310 nm up to 24 dBm.

Variable Optical Attenuator (VOA)



Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Support SMF, MMF and PMF.

Polarization Controller & Scrambler



High-speed automated polarization control with broad wavelength coverage from 1260 to 1650 nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.

Optical Power Meter



Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 to 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.

Optical Spectrum Analyzer (OSA)



Cost-effective, spectral measurement in a compact module with built-in analysis for: SMSR, OSNR & spectral width. Targeted wavelengths for specific applications in O band, C band & L band.

Optical-to-Electrical Converter



High bandwidth, broadband O-to-E converter. Choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.

Optical Switch



Proven reliability and fast switching time. Wide variety of switch configurations and models support SMF, MMF and PMF.

Photonic Doppler Velocimeter (PDV)



Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.

Passive Component Integration



Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beamsplitters and circulators. SMF, MMF and PMF.

Digital Sampling Oscilloscope (DSO)



Digital equivalent-time sampling oscilloscope (DSO) with high-quality precision timebase and low jitter mode, available in 1 or 2 channels in a compact benchtop instrument.

Clock Recovery Instrument (CDR)



Clock recovery instrument for the QCA Series. Low jitter design and precise phase-locking provide a reliable, scalable solution for high-speed communication testing.

Coherent Transmitter



Generate high-quality coherent optical signals for transmitter development, testing and advanced modulation research.

Coherent Receiver



High-performance coherent optical receiver for accurate measurement and characterization of coherent modulation formats.

VISIQ Analysis Software

VISIQ

Coherent signal analysis software for intuitive DSP configuration, signal analysis and optimization.

Test. Measure. Solve.™

Quantifi Photonics provides test solutions to help customers unlock scalable and cost-effective high-volume manufacturing of photonic integrated circuits (PICs), co-packaged optics and pluggable optics. The company's portfolio includes a wide range of photonic test instruments, and digital sampling oscilloscopes, available as benchtop or the industry-standard PXI format to support cost-effective, high-throughput design verification testing and high-volume manufacturing.

To find out more, get in touch with us today.

General Enquiries sales@quantifiphotonics.com
Technical Support support@quantifiphotonics.com
Phone - NZ +64 9 478 4849
Phone - USA +1-800-803-8872

quantifiphotonics.com

QUANTIFI PHOTONICS®
A Teradyne Company

Quantifi Photonics Ltd © 2026. All rights reserved. No part of this publication may be reproduced, adapted, or translated in any form or by any means without the prior permission from Quantifi Photonics Ltd. All specifications are subject to change without notice. Please contact Quantifi Photonics for the latest information.